


"SH" Q-D BUSHING

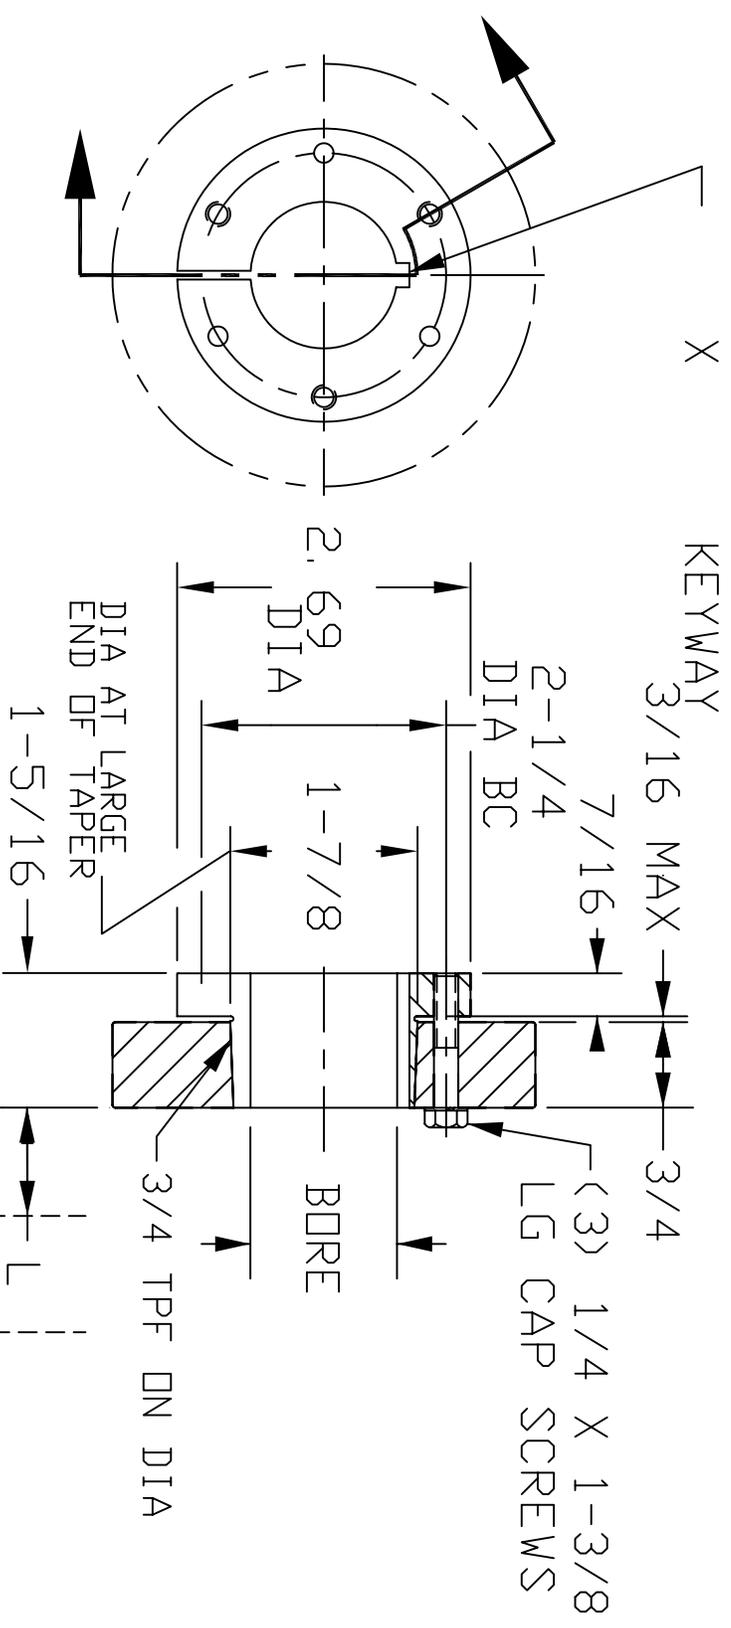

CONVENTIONAL MOUNTING

REVERSE MOUNTING

APPROVAL

CONVENTIONAL MOUNTING SPACE REQUIRED		REVERSE MOUNTING SPACE REQUIRED	
TO TIGHTEN BUSHING	TO LOOSEN BUSHING	TO TIGHTEN BUSHING	TO LOOSEN BUSHING
OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH
19/32	2-21/32	1-9/16	3-5/8
		1-9/16	3-5/8
		2-1/8	4-3/16

THE MATERIALS AND INFORMATION, INCLUDING THE PRINCIPALS OF DESIGN PRESENTED, ARE THE EXCLUSIVE PROPERTY OF THE GATES RUBBER COMPANY AND ARE TO BE CONSIDERED AS CONFIDENTIAL INFORMATION. ACCORDINGLY, THIS INFORMATION IS SUBMITTED TO YOU WITH THE AGREEMENT THAT IT IS NOT TO BE REPRODUCED, COPIED, OR LOANED, IN PART OR IN WHOLE, NOR IS THE INFORMATION TO BE RELAYED TO ANY OTHER INDIVIDUAL OR COMPANY. ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO THE ABOVE.

THIS DRAWING IS A STOCK POWER TRANSMISSION COMPONENT. DETAILS SHOWN WHICH DO NOT AFFECT DRIVE FUNCTION, MAY BE CHANGED WITHOUT ANY NOTIFICATION.

ORDER NO. : _____ PRODUCT QD Bushing

CUSTOMER ORDER NO. : _____ PART SH

APPROVED BY _____ DATE _____

DR. BY _____ MDW DATE 05/20/2004

CK. BY _____

Appd. By JEM

DRAWING NO. 7838-1XXX

DIST. DAY

