


# 3M™ Polyester Tape 8992

## Economical



## Powder coat masking

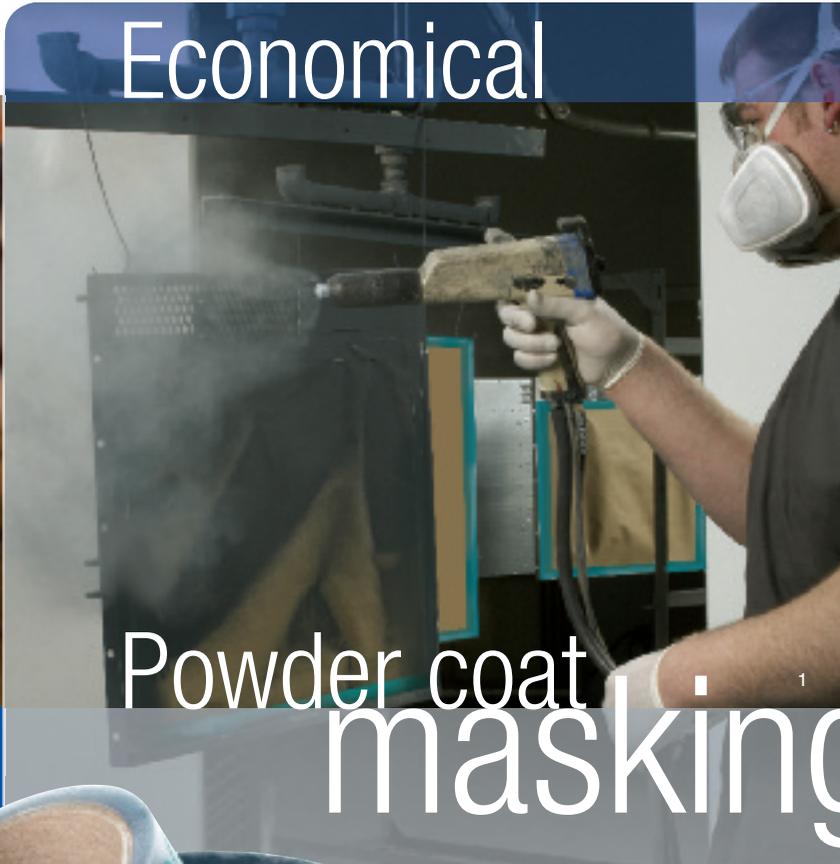

Tight on contact,  
off clean after 400°F baking

With pressure sensitive silicone adhesive, 3M™ Polyester Tape 8992 grabs on contact for reliable masking in most powder coat painting operations with baking at up to 400°F (204°C). Stays in place even when wrapped around curves or pressed into corners.

- Thin caliper with 2.0 mil polyester and 1.3 mil adhesive for a sharp, clean paint edge
- High dimensional and tensile strength (48 lbs./in.) for tearing through cured paint without slivering or breaking
- Resists shrinking, curling, and edge lifting but removes without adhesive residue
- Transparent dark green for identification and alignment
- Available with polyester liner for die-cutting into precise shapes

Use also for reliable masking in e-coating and anodizing.



Clean removal, sharp paint edge



# 3M™ Polyester Tapes for High Temperature Applications

## Product Information:

Product/ Color	Tape Structure (Backing/Adhesive)	Backing Thickness mils (mm)	Total Thickness mils (mm)	Adhesion to Steel oz./in. (N/100 mm)	Tensile Strength lbs./in. (N/100 mm)	Elongation at Break %	Temperature Range °F (°C)	Comments
ASTM Test Method:		D-3652	D-3652	D-3330	D-3759	D-3759		
8992/8992L/Green	Polyester/Silicone	2.0 (0.05)	3.3 (0.08)	33 (36)	48 (840)	83	-60 to 400°F (-50 to 204°C)	"Go-to" for reliable, cost-effective powder coat masking.
8952/8952L/Blue	Polyester/Silicone	2.0 (0.05)	3.5 (0.09)	40 (44)	55 (963)	110	-60 to 425°F (-50 to 218°C)	High temperature applications.
8951/Blue	Polyester/Silicone	1.0 (0.03)	2.7 (0.07)	30 (33)	30 (525)	100	-60 to 425°F (-50 to 218°C)	High temperature applications.
8905/Blue	Polyester/Silicone	5.0 (0.13)	6.5 (0.17)	43 (47)	150 (2627)	130	-60 to 400°F (-50 to 20°C)	High temperature coating.
8902/Blue	Polyester/Silicone	2.0 (0.05)	3.4 (0.09)	40 (44)	53 (928)	130	-60 to 400°F (-50 to 204°C)	High temperature coating.
8901/Blue	Polyester/Silicone	0.9 (0.02)	2.6 (0.06)	32 (35)	28 (490)	115	-60 to 400°F (-50 to 204°C)	High temperature coating.

Note: Technical information and data should be considered representative or typical only and should not be used for specification purposes.

**Warranty, Limited Remedy, and Disclaimer:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



## Industrial Adhesives and Tapes Division

3M Center  
 Building 225-5S  
 St. Paul, MN 55144-1000  
 1 800 362 3550  
[www.3M.com/industrialtapes](http://www.3M.com/industrialtapes)

© 2009, 3M. All rights reserved.  
 70-0711-0212-6