

# 630 SERIES

## Straight Line Action Clamps | Product Overview

### Features:

- For push/pull clamping
- Allow handle to rotate and fall below mounting plane to lock in retracted position
- Available in stainless steel
- Available with DESTACO® Toggle Lock Plus™
- 5 handle colors - see page MC-PRO-7 for details

### Applications:

- Assembly & test
- Welding
- Tensioning devices

### Also Available:

See page MC-ACC-1 for accessories  
830, 830-ME Pneumatic Toggle Clamp  
(See page MC-PTC-25)

630  
630-M



630-SS  
630-MSS  
Stainless Steel




630-R  
630-MR  
with DESTACO®  
Toggle Lock  
Plus™



630-RSS  
630-MRSS  
Stainless Steel  
with DESTACO®  
Toggle Lock  
Plus™





## Technical Information | Holding Capacities | Dimensions



Model	Max. Holding Capacity	Weight	EF:AF (pushing/pulling)	Plunger Travel	(M) Plunger Thread	Recommended Spindle (Not Supplied)
630					3/8-16	210203
630-SS						237943
630-M					M10	210203-M
630-MSS	[2500 lbf] 11100 N	[1.90 lb] 0,89 kg	36:1/23:1	[2.00] 50,8		237943-M
630-R					3/8-16	210203
630-RSS						237943
630-MR					M10	210203-M
630-MRSS						237943-M

HC = Holding Capacity, EF = Exerting Force, AF = Applied Force

**DESTACO® TOGGLE LOCK PLUS™ OPTION**  
(Engages in extended position only)

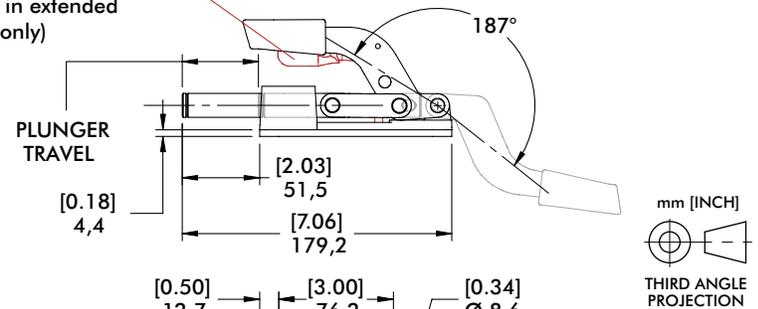

### Color Handles

Available on models in this series.\* Add -Y, -G, -B, -K to end of model number.

\*Excludes Toggle Lock Plus levers or dipped handles.

