
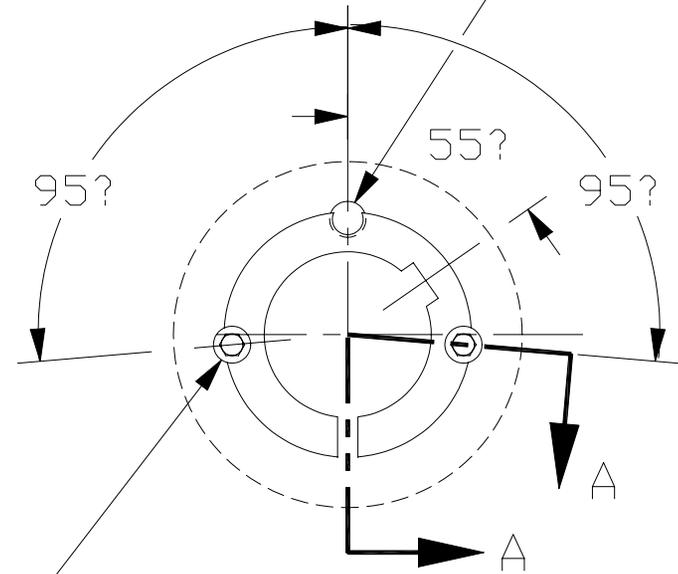


1215 TAPER-LOCK BUSHING

USE ONLY ONE SCREW FOR REMOVING
FROM SHAFT:
BUSHING HALF OF HOLE IS THREADED &
HUB HALF OF HOLE IS NOT THREADED

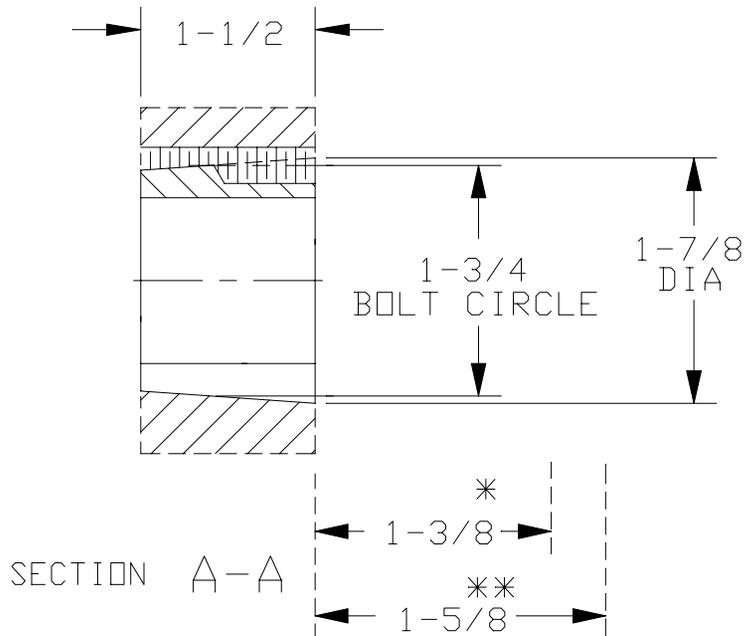

(2) 3/8-16 NC X 5/8 LG SET SCREWS
FURN W/ BUSH TO TIGHTEN ON SHAFT
(HUB HALF OF HOLE IS THREADED &
BUSH HALF OF HOLE IS NOT THREADED)

BORE:
BUSHING KW:

CERTIFIED

- * SPACE REQD TO TIGHTEN BUSHING
ALSO SPACE REQD TO LOOSEN SCREWS TO
PERMIT REMOVAL OF HUB BY PULLER.
 - ** SPACE REQD TO LOOSEN BUSHING USING
ONE SCREW AS JACKSCREW-NO PULLER REQD.
- 8? INCLUDED ANGLE

CUSTOMER NAME: CUSTOMER DWG NO.:	APPROVED BY _____ DATE _____	DIST.
THE GATES RUBBER CO. DENVER, COLORADO	DR. BY _____ DATE _____ CK. BY _____ APPD. BY _____	DRAWING NO.